


## Safety-Steelnails

with depression head out of gehärtetem steel, out of zinc



employsaftsteel nails

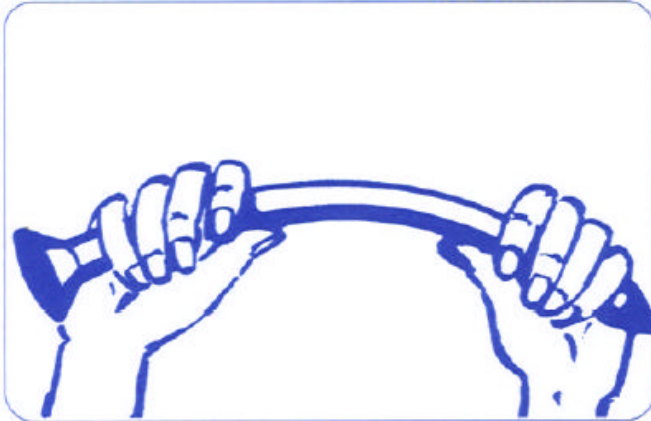

pleaseavoidsuchaccidents

suitableforthe fixation  
of slats, boards, wooden casings, plaster strips, facing ect  
on bricks, layer works and concrete

order-label	mm Ø	total length mm	order-label	mm Ø	total length mm
NS25/18/250	2,5	18	NS25/18/500	2,5	18
NS25/25/250	2,5	25	NS25/25/500	2,5	25
NS25/30/250	2,5	30	NS25/30/500	2,5	30
NS25/40/250	2,5	40	NS25/40/500	2,5	40
NS25/50/250	2,5	50	NS25/50/500	2,5	50
NS30/30/250	3,0	30	NS30/30/500	3,0	30
NS30/35/250	3,0	35	NS30/35/500	3,0	35
NS30/40/250	3,0	40	NS30/40/500	3,0	40
NS30/50/250	3,0	50	NS30/50/500	3,0	50
NS30/60/250	3,0	60	NS30/60/500	3,0	60
NS30/70/250	3,0	70	NS30/70/500	3,0	70
NS30/80/250	3,0	80	NS30/80/500	3,0	80
NS35/40/250	3,5	40	NS35/40/500	3,5	40
NS35/50/250	3,5	50	NS35/50/500	3,5	50
NS35/60/250	3,5	60	NS35/60/500	3,5	60
NS35/67/250	3,5	67	NS35/67/500	3,5	67
NS35/75/250	3,5	75	NS35/75/500	3,5	75
NS35/85/250	3,5	85	NS35/85/500	3,5	85